





Mercury Free Alkaline Button Cell DataSheet

everActive LR1130 LR54 AG10

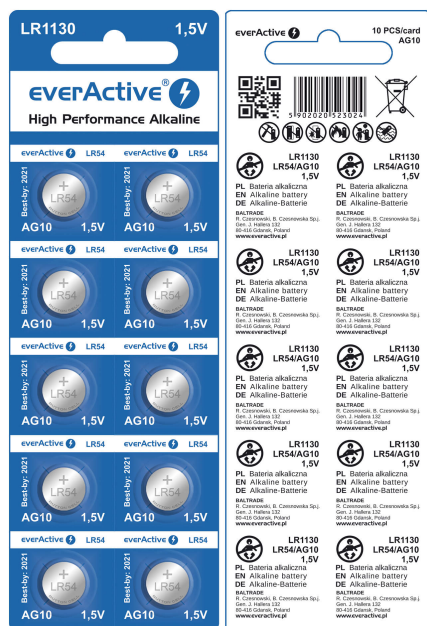

Designation IEC:	LR1130 / LR54
Nominal voltage:	1.5V
Designed capacity:	70 mAh
Typical capacity:	65 mAh (load 15kΩ down to 0.9V at 25°C)
Weight:	1.08 g
Dimensions:	11.45 x 3.05 mm
Temperature ranges:	long-term storage: 0..35°C application/discharge: -10..50°C
Approved standards:	IEC 60086-3, Directive 2013/56/EU

Discharge characteristics (load 15kΩ down to 0.9V at 25°C):

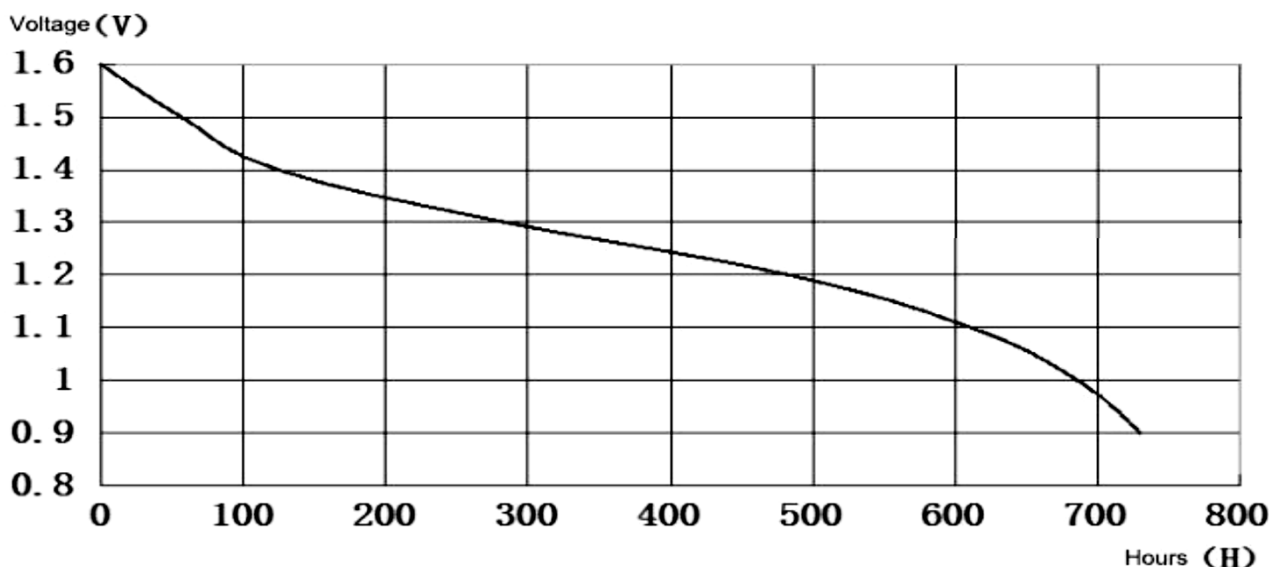

“everActive” is a registered trademark of Baltrade sp. z o.o. company.

Place, date of issue: Gdansk, 29.04.2016