



Bateria litowa CR1632 'High Performance Battery'



Desygnacja IEC: **CR1632**

Napięcie nominalne: **3V**

Pojemność projektowana: **150 mAh**

Pojemność: **140 mAh**
(load 47k Ω down to 2.0V at 20°C)

Waga: **1.7 g**


Wymiary: **16 x 3.2 mm**

Zakres temperatur:
przechowywanie: ..40°C
użytkowanie/rozładowanie: -20..60°C

Discharge characteristics (load 47 k Ω):

load: 47K Ω

end-point voltage: 2.0V

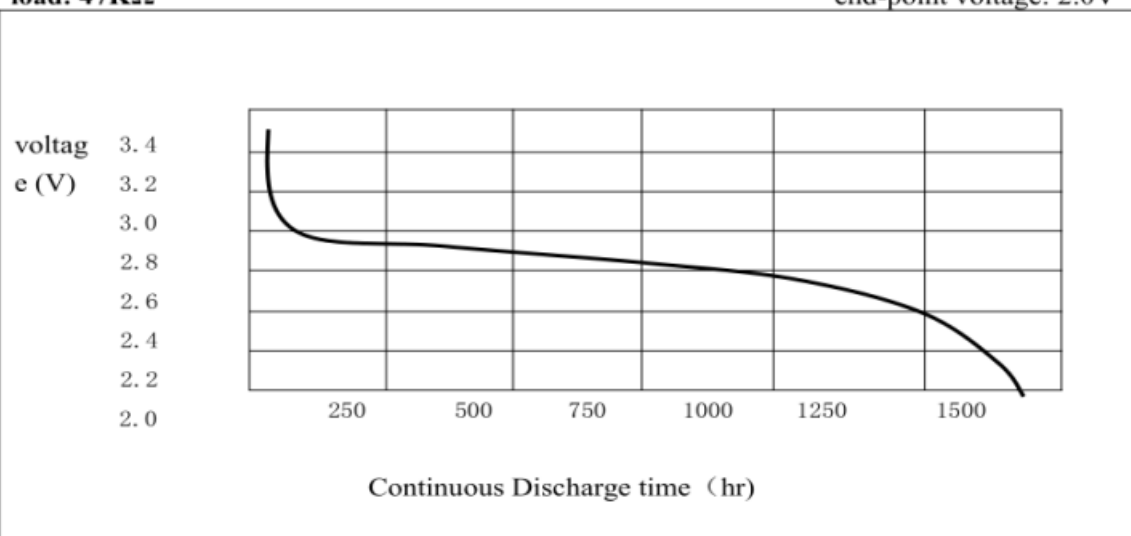

Baltrade sp. z o.o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
ehandel@baltrade.pl



Miejsce, data: Gdańsk, 04.02.2025



Bateria litowa CR1632 'High Performance Battery'



Designation IEC: **CR1632**

Nominal voltage: **3V**

Designed capacity: **150 mAh**

Typical capacity: **140 mAh**
(load 47k Ω down to 2.0V at 20°C)

Weight: **1.7 g**


Dimensions: **16 x 3.2 mm**

Temperature ranges:
long-term storage: 0..40°C
application/discharge: -20..60°C

Discharge characteristics (load 47 k Ω):

load: 47K Ω

end-point voltage: 2.0V

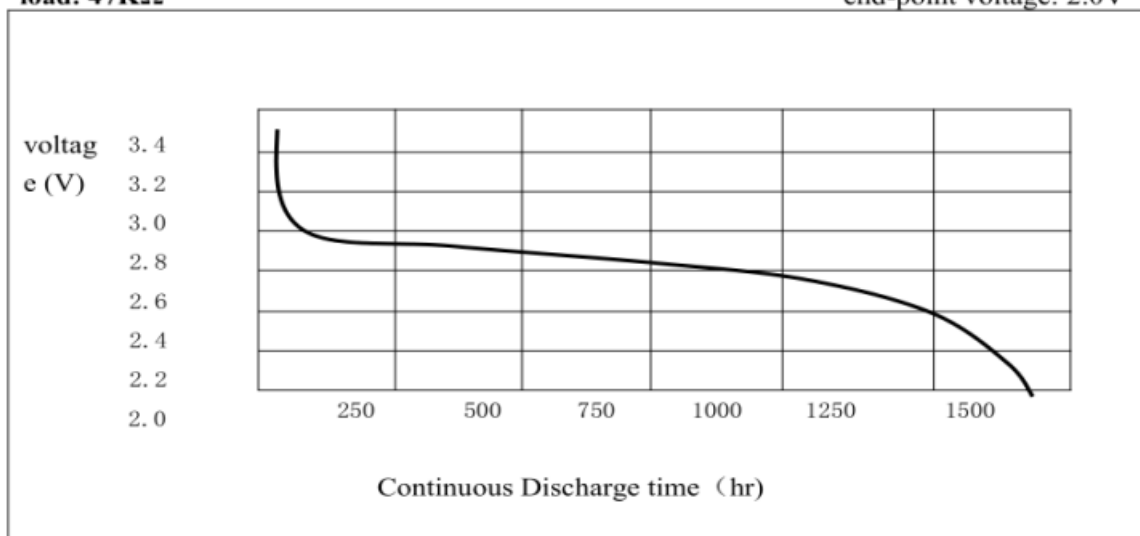

Baltrade sp. z o.o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
ehandel@baltrade.pl



Miejsce, data: Gdańsk, 04.02.2025